

COMMON MODE CHOKE FOR ADSL AND VDSL

Features:

- For use in XDSL interfaces.
- Effective reduction of C.M.noise caused by AM broadcast or ham radio
- Isolation 1500V line to line
- Tape&Reel packaging available for surface mount parts

Electrical Specifications @ 25°C-- Operating Temperature -40°C to +85°C


Part Number	Common mode Attenuation (dB TYP)			Isolation Voltage (Vrms)	Mounting
	500KHz	1MHz	10MHz		
PACM1003	45	49	35	1500	THT
PACM1005	45	49	35	1500	SMT
PACM1006	45	49	35	1500	SMT

Mechanical


Schematic

PACM10

PACM10

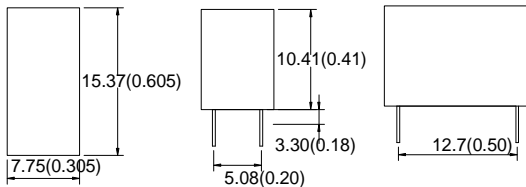


Unit: mm(inch)
Tolerances: ±0.25(±0.10)




PACM10

PACM10

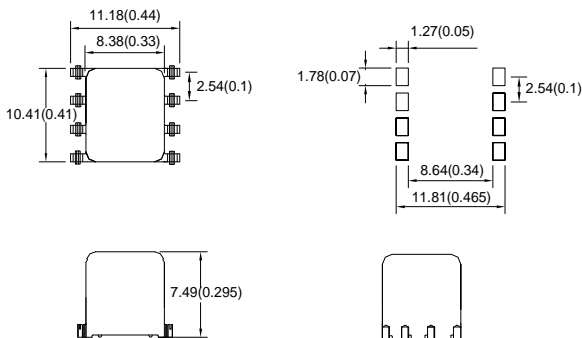


Unit: mm(inch)
Tolerances: ±0.25(±0.10)

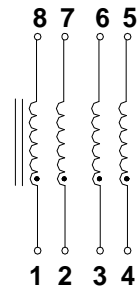


PACM10

PACM10

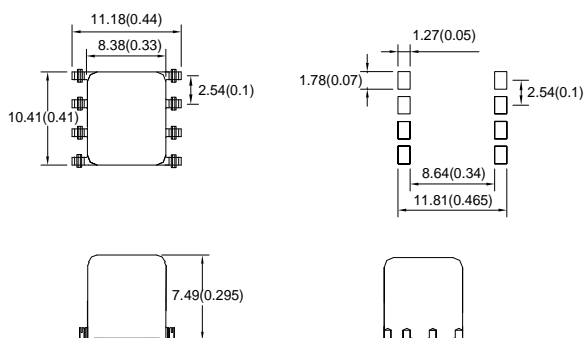

Unit: mm(inch)
Tolerances: ±0.25(±0.10)



www.peianpeian.com