


型号	Type	EPC1008	EPC1313	EPC1313	EPC1717	EPC1716-1	EPC1919
尺寸 Dimension (mm)	型式	2	2	2	2	1	2
	A	10.20±0.20	13.25±0.30	13.25±0.30	17.60±0.40	16.80±0.40	19.10±0.40
	B	7.60min	10.50min	10.80min	14.30min	13.50min	15.80min
	C	5.00±0.10	5.65±0.15	5.65±0.15	7.70±0.15	7.70±0.20	8.50±0.15
	D	3.40±0.10	4.60±0.15	4.60±0.15	6.00±0.15	5.75±0.20	6.00±0.15
	E	4.05±0.10	6.60±0.20	6.80±0.20	8.55±0.20	7.80±0.20	9.75±0.20
	F	2.65±0.10	4.50±0.20	4.70±0.20	6.05±0.200	5.40±0.20	7.25±0.20
	G	5.30min	8.30min	8.30min	11.50min	11.00min	13.10min
H	1.10±0.10	2.05±0.10	2.05±0.10	2.80±0.10	2.70±0.20	2.50±0.10	
磁芯常数 C_i (mm^{-1}) Core Factor		1.89	2.46		1.76	1.69	2.03
有效磁路长度 l_e (mm) Effective Length l_e		17.8	30.6		40.2	33.7	46.1
有效截面积 A_e (mm^2) Effective Area		9.39	12.5		22.8	19.9	22.7
有效体积 V_e (mm^3) Effective Volume		167	382		9117	670	1047
重量 w Weight(g)		1.1	2.1		4.5	3.3	5.3
电感系数 $A_L(\text{nH}/\text{N}^2)$	HP40	960±25%	870±25%	850±25%	1150±25%	1200±25%	940±25%
	HP44						
	HB5K						
	PA7K						
	PA10K						
	PA15K						

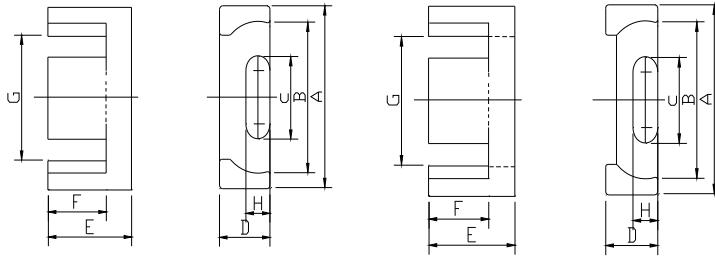

1 型

2 型

型号	Type	EPC2525	EPC2525	EPC2732	EPC3035		
尺寸 Dimension (mm)	型式	2	2	2	2		
	A	25.10±0.50	24.65±0.35	27.10±0.50	30.10±0.50		
	B	20.65min	20.65min	21.60min	23.60min		
	C	11.50±0.20	11.45±0.25	13.00±0.30	15.00±0.30		
	D	8.00±0.20	8.00±0.20	8.00±0.20	8.00±0.25		
	E	12.50±0.20	12.40±0.20	16.00±0.20	17.50±0.20		
	F	9.00±0.30	9.00±0.25	12.00±0.30	13.00±0.30		
	G	17.00min	17.10min	18.50min	20.00min		
H	4.00±0.10	3.90±0.10	4.00±0.10	4.00±0.10			
磁芯常数 C_1 (mm ⁻¹) Core Factor		1.28		1.34	1.32		
有效磁路长度 l_e (mm) Effective Length l_e		59.2		73.1	81.6		
有效截面积 A_e (mm ²) Effective Area		46.4		54.6	61.0		
有效体积 V_e (mm ³) Effective Volume		2748		3995	5035		
重量 w Weight(g)		13		20	23		
电感系数 A_L (nH/N ²)	HP40	1500±25%		1475±25%	1500±25%		
	HP44						
	HB5K						
	PA7K						
	PA10K						
	PA15K						